

JACKSON COUNTY, OHIO
 GEODETIC CONTROL SURVEY

W.O. 96017

MAP PROJECTION: LAMBERT

ORDER OF SURVEY: FIRST


NAD 83/86 * OHIO STATE PLANE COORDINATE SYSTEM * SOUTH ZONE

COUNTY	NAME OF STATION		YEAR
JACKSON COUNTY	2 BYER		1996
N: 431046.855	E: 1929620.041	LAT.: 39°11'00.28748"	LONG.: 82°38'13.79208"
GRID FACTOR: 0.99994203	SEA LEVEL FACTOR: 0.99996931	⊕ ANGLE: -0°05'13.32"	
ESTABLISHED BY: GeoMetrics GPS, INC.	YEAR 1996	DISTANCES AND DIRECTIONS TO REFERENCE MARKS AND PROMINENT OBJECTS OBSERVED AT STATION	
OBJECT		DISTANCE-FT.	MAG. AZIMUTH
VERTICAL DATUM NAVD 88		(SEE SKETCH BELOW)	
ELEVATION (FT.) 641.68			
VERTICAL ORDER: THIRD			

DESCRIPTION OF STATION:

The station is a standard Jackson County, Ohio aluminum survey disk stamped BYER 2 1996 set flush with the ground in the top of a reinforced poured-in-place concrete monument located in Jackson County, Ohio about 5.0 miles northwest of the town of Wellston. To reach the station from the intersection of Route 327 North and Route 93 North in Wellston proceed northwest along Route 327 a distance of 8.0 miles to its intersection with Byers Church at Second Street. Turn left and proceed south along Second Street a distance of 0.4 miles to the end of the road and the station on the right.

SKETCH OF STATION:
 APPROX. SCALE: 1" = 30'

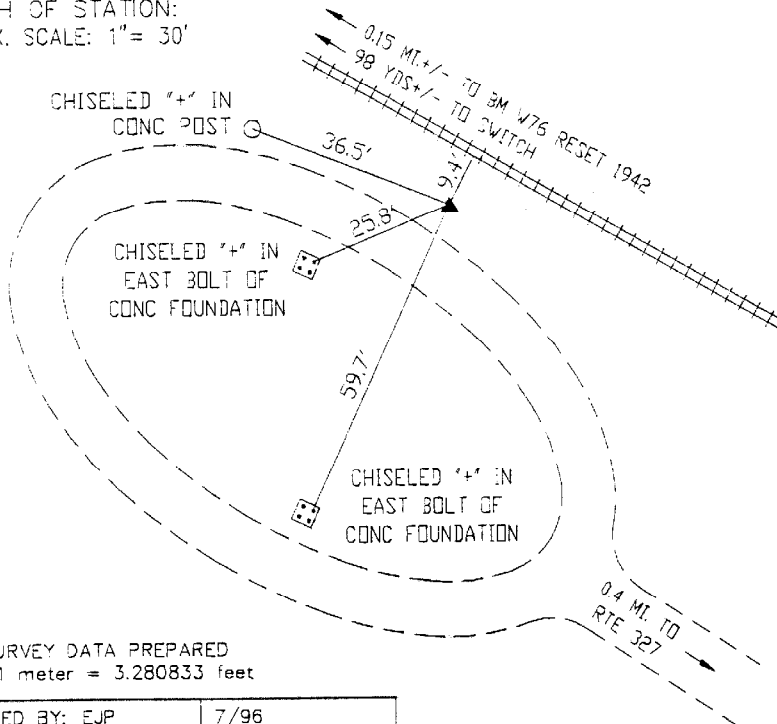

THIS SURVEY DATA PREPARED
 USING 1 meter = 3.280833 feet

PREPARED BY: EJP	7/96
CHECKED BY: DAR	7/96

GEOMETRICS
 GPS, INC.

355 BUTLER ROAD
 FREDERICKSBURG, VIRGINIA
 (540) 372-3499